

# SET 1101+ LABELLING SYSTEM

## 1101 PRODUCT LINE STANDARD WRAP AROUND UNITS FOR CYLINDRICAL PRODUCTS

- Capacity up to 60 products per minute
- One full wraparound label or two (front and back)
- Central control panel
- Label height up to 220 mm
- Ethernet connection for remote diagnostics
- Optional TTO or Ink-Jet overprint
- Quick format parts changeover without tools
- Optional - orientation of the label on the bottle
- Possibility to use transparent labels





The real maximum labelling speed depends on the label, capacity, type of the labelled product and the kind of application.  
The label feeding precision depends on the label and the labelled product properties.



**PARAMETER**
**SET 1101+**

LABELLING HEAD	INTREX 200+ 90 300	INTREX 200+ 160 300	INTREX 200+ 220 300
<b>MAXIMUM LABEL WIDTH (HEIGHT ON THE PRODUCT)</b>	90mm	160mm	220mm
<b>MAXIMUM LABEL ROLL DIAMETER (UNWINDER)</b>	300 mm (optional: 350 mm), core: 40 mm or 76 mm		
<b>LABEL SENSOR</b>	Optical (optional: ultrasonic for transparent labels)		
<b>MAXIMUM CAPACITY</b>	Up to 60 products per minute		
<b>PRODUCT DIAMETER</b>	30 mm to 100 mm		
<b>CONTROL SYSTEM</b>	B&R PLC, 7" full colour touch screen, up to 100 recipes can be prepared and stored for future use, logins with different access levels, graphical help for control settings, machine log memory, remote internet access for remote diagnostics		
<b>CONVEYOR</b>	Belt conveyor, width: 100 mm, length: 1500 mm		
<b>OPTIONAL MODULES</b>	Orientation sensor, in-feed queue sensor, out-feed jam sensor, low labels sensor, beacon, bracket for thermal transfer printer		
<b>POWER SUPPLY</b>	230VAC, 50Hz, compressed air: 0.6 MPa		

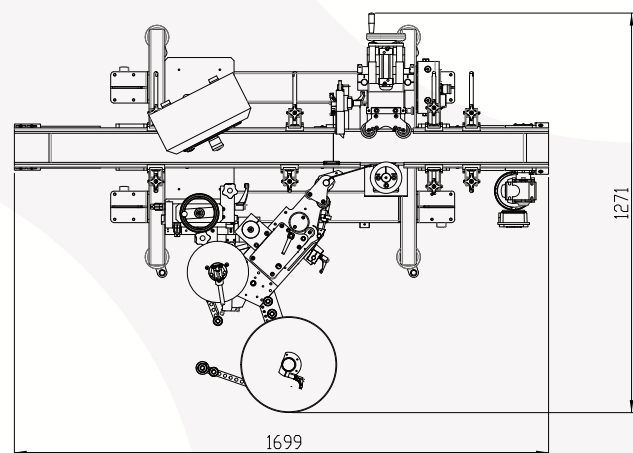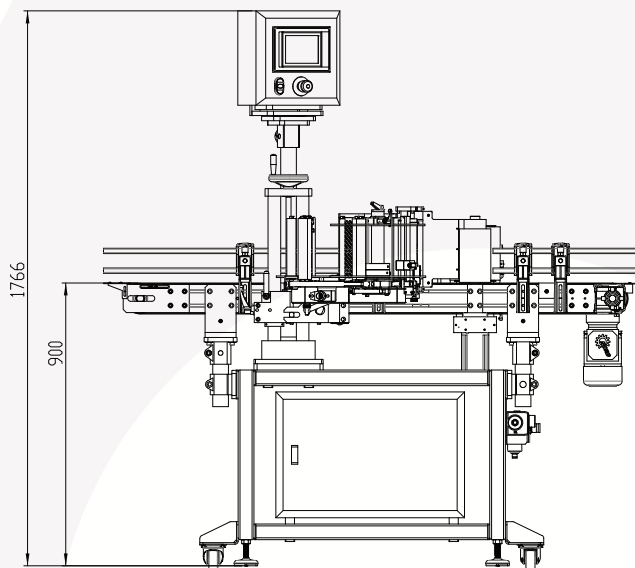

The real maximum labelling speed depends on the label, capacity, type of the labelled product and the kind of application.  
The label feeding precision depends on the label and the labelled product properties.