


INTREX 50+ LABELLING HEAD

...> THE SMALLEST LABELLING HEAD OF THE SERIES

INTREX 50+ FEATURES:

- Maximum label width - 90 mm
- Label feed speed up to 45 m/min
- Multiple labelling option, 2 or more labels from one signal
- Ethernet connection for remote diagnostics
- Up to 100 labelling recipes storage
- Different software languages
- I/O communication ports (errors, speed encoders, printer signals, etc.)
- Password protected access to different settings levels (operator, maintenance, service)
- Simple integration with packaging machines
- Compact size
- Easy integration with any kind encoder

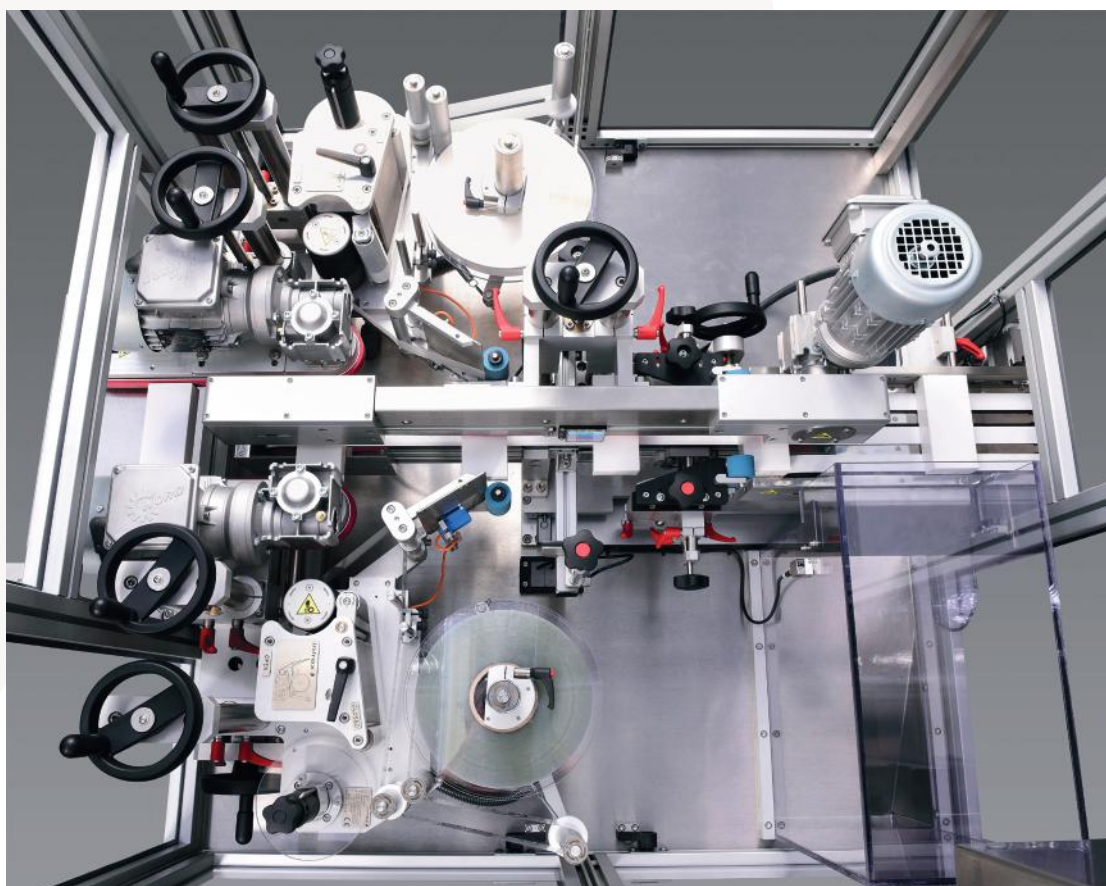

Two I50+ labelling heads installed inside machine.

The real maximum labelling speed depends on the label, capacity, type of the labelled product and the kind of application. The label feeding precision depends on the label and the labelled product properties.

INTREX 50+

VERSIONS

Right
Left

MAX LABEL
LINER WIDTH

90 mm

MAX LABEL
ROLL DIAMETER

.....
200 mm

.....
LABELLING SPEED *

Up to 45 m/min

**LABEL FEEDING
PRECISION ****

$$\dots + 0.8 \text{ mm}$$

.....
LABEL SENSOR

.....
Optical
Ultrasonic (optional)

.....
CONTROLLER

Remote with 3.5" touch screen

.....
MEMORY

100 recipes with alphanumeric names

CONFIGURABLE PARAMETERS


- Label positioning
- 2 steps label feed
- Speed: fixed or adaptive with encoder
- Multiple labelling option, 2 or more labels from one signal

DRIVE

.....
Stepper motor

POWER SUPPLY

~230 VAC, 50 Hz

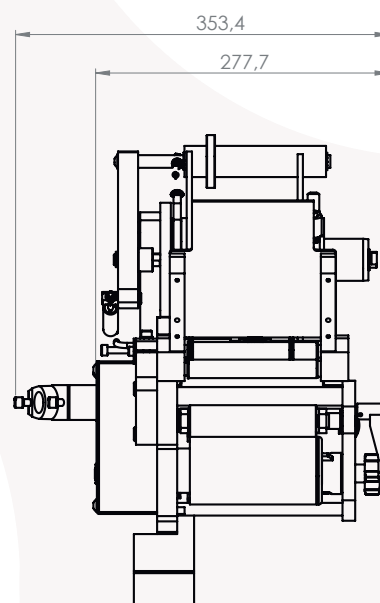

**The label feeding precision depends on the label and the labelled product properties.